

HYDRAULIC DRIVEN HEADS


MULCHERS FOR EXCAVATORS	Excavator weight (t)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Weight (lbs)	Max shredding Ø (in)	
BL0/EX	2-5	8-24	2600-3600	22-39	470-728	3	
BL1/EX	5-7,5	16-37	2600-5080	31	849-860	5	
BL2/EX	8-14	26-37	2600-5080	39-49	1257-1378	6	
BL2/S/EX	11-16	26-48	2600-5080	53	2293	6	
BL3/EX	14-20	32-55	2600-5080	53-62	2855-3020	8	
BL4/EX	18-25	38-79	3200-5080	53-62	3483-3715	12	
BL5/EX	24-36	48-79	3500-5080	62	5236	16	
PML/EX	2-7,5	7-24	2600-3600	28-59	463-750	1.6-2	
PMM/EX	6-13	15-38	2600-5080	42-61	1146-1499	3	
DML/HY	5-13	13-53	2600-5080	31-49	915-1146	5	
UML/HY	9-15	24-45	2600-5080	43-62	2072-2425	6	
UML/EX	14-20	34-55	3200-5080	43-62	2403-2822	8	
UML/S/EX	18-25	38-79	3200-5080	53-62	3197-3417	12	
UMM/EX	20-36	34-79	3500-5080	53-62	4387-4850	12-16	
UMM/S/EX	25-40	66-119	3600-5800	62	5071	16	
UML/HY/RW	6-10	24-48	3200-5100	53-62	1499-1653	5	
FML/HY/RW	6-10	17-44	3200-5100	53-62	1213-1301	5	
RQL/HY	10-15	24-53	2600-5080	49-68	1235-1477	6	
MULCHERS FOR SKID STEERS	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding Ø (in)
BL1/SSL	45-65	13-26	2600-5080	49-58	58-68	1256-1455	4
PMM/SSL	65-100	15-33	2600-3600	70-80	79-86	1874-2006	3
DML/SSL	50-75	16-33	2600-5080	58-68	68-78	1610-1850	5
BL4/SSL	90-135	32-45	3500-5080	62-72	75-84	2734-3020	12
UML/SSL	75-135	30-53	2900-5080	62-72	74-83	2866-3086	8
STC/SSL (stones)	90-120	29-40	3200-5080	63	75	2668	6
ROTARY CUTTERS FOR SKID STEERS	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding Ø (in)
RCM/SSL	75-150	24-45	2900-5080	73-83	77-86	2006-2161	4
STUMP CUTTERS FOR EXCAVATORS	Excavator weight (t)	Flow rate (gal/min)	Pressure (PSI)	Total width (in)	Weight (lbs)	Rotor Ø (in)	
SCL/HY	4-7,5	13-28	2600-5080	25	1014	22.4	
SCL/EX	7-15	28-45	2600-5080	36	1664	26	
SCM/EX	14-24	34-49	3200-5080	31	2425	32	
STUMP CUTTERS FOR SKID STEERS	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max working depth (in)
SCL/SSL	75-120	32-40	2600-5080	37	46	992	20
MULCHERS FOR SPECIAL VEHICLES	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding Ø (in)
140/U/PM	150-220	34-55	3600-5800	55-91	69-104	3439-4189	10
200/U/PM	180-300	40-95	3626-6019	81-91	97-106	6526-6878	14
300/U/PM	300-450	98-135	3600-6000	91-100	110-119	8488-9722	16
500/U/PM	400-600	98-198	3600-5800	91-101	113-122	10385-11465	20
TILLERS FOR SPECIAL VEHICLES	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max working depth / shredding Ø (in)
200/S/PM	250-300	94-108	4600-5800	91-101	105-114	6971-7496	12
300/S/PM	250-400	132-174	4600-5800	91-101	105-115	7760-8311	16/20
STUMP CUTTERS FOR SPECIAL VEHICLES	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max working depth / shredding Ø (in)
300/SC/PM	250-300	79-98	5080-5800	57	4630	39/20	
MULTITASKS FOR SPECIAL VEHICLES	Engine (hp)	Flow rate (gal/min)	Pressure (PSI)	Working width (in)	Total width (in)	Weight (lbs)	Max shredding stones / trees / stumps Ø (in)
SFM/PM	300-450	92-103	5080-5800	91-100	103-113	9039-9700	8/14/18
SFH/PM	350-450	124-140	5080-5800	91-101	107-116	12346-13007	14/18/22

The data refers to the minimum and maximum values of the product ranges. Refer to the technical table of the specific model for more details.

DP059013 - 03/2026 - by FAE S.p.A.



LAND CLEARING Hydraulic Driven Heads

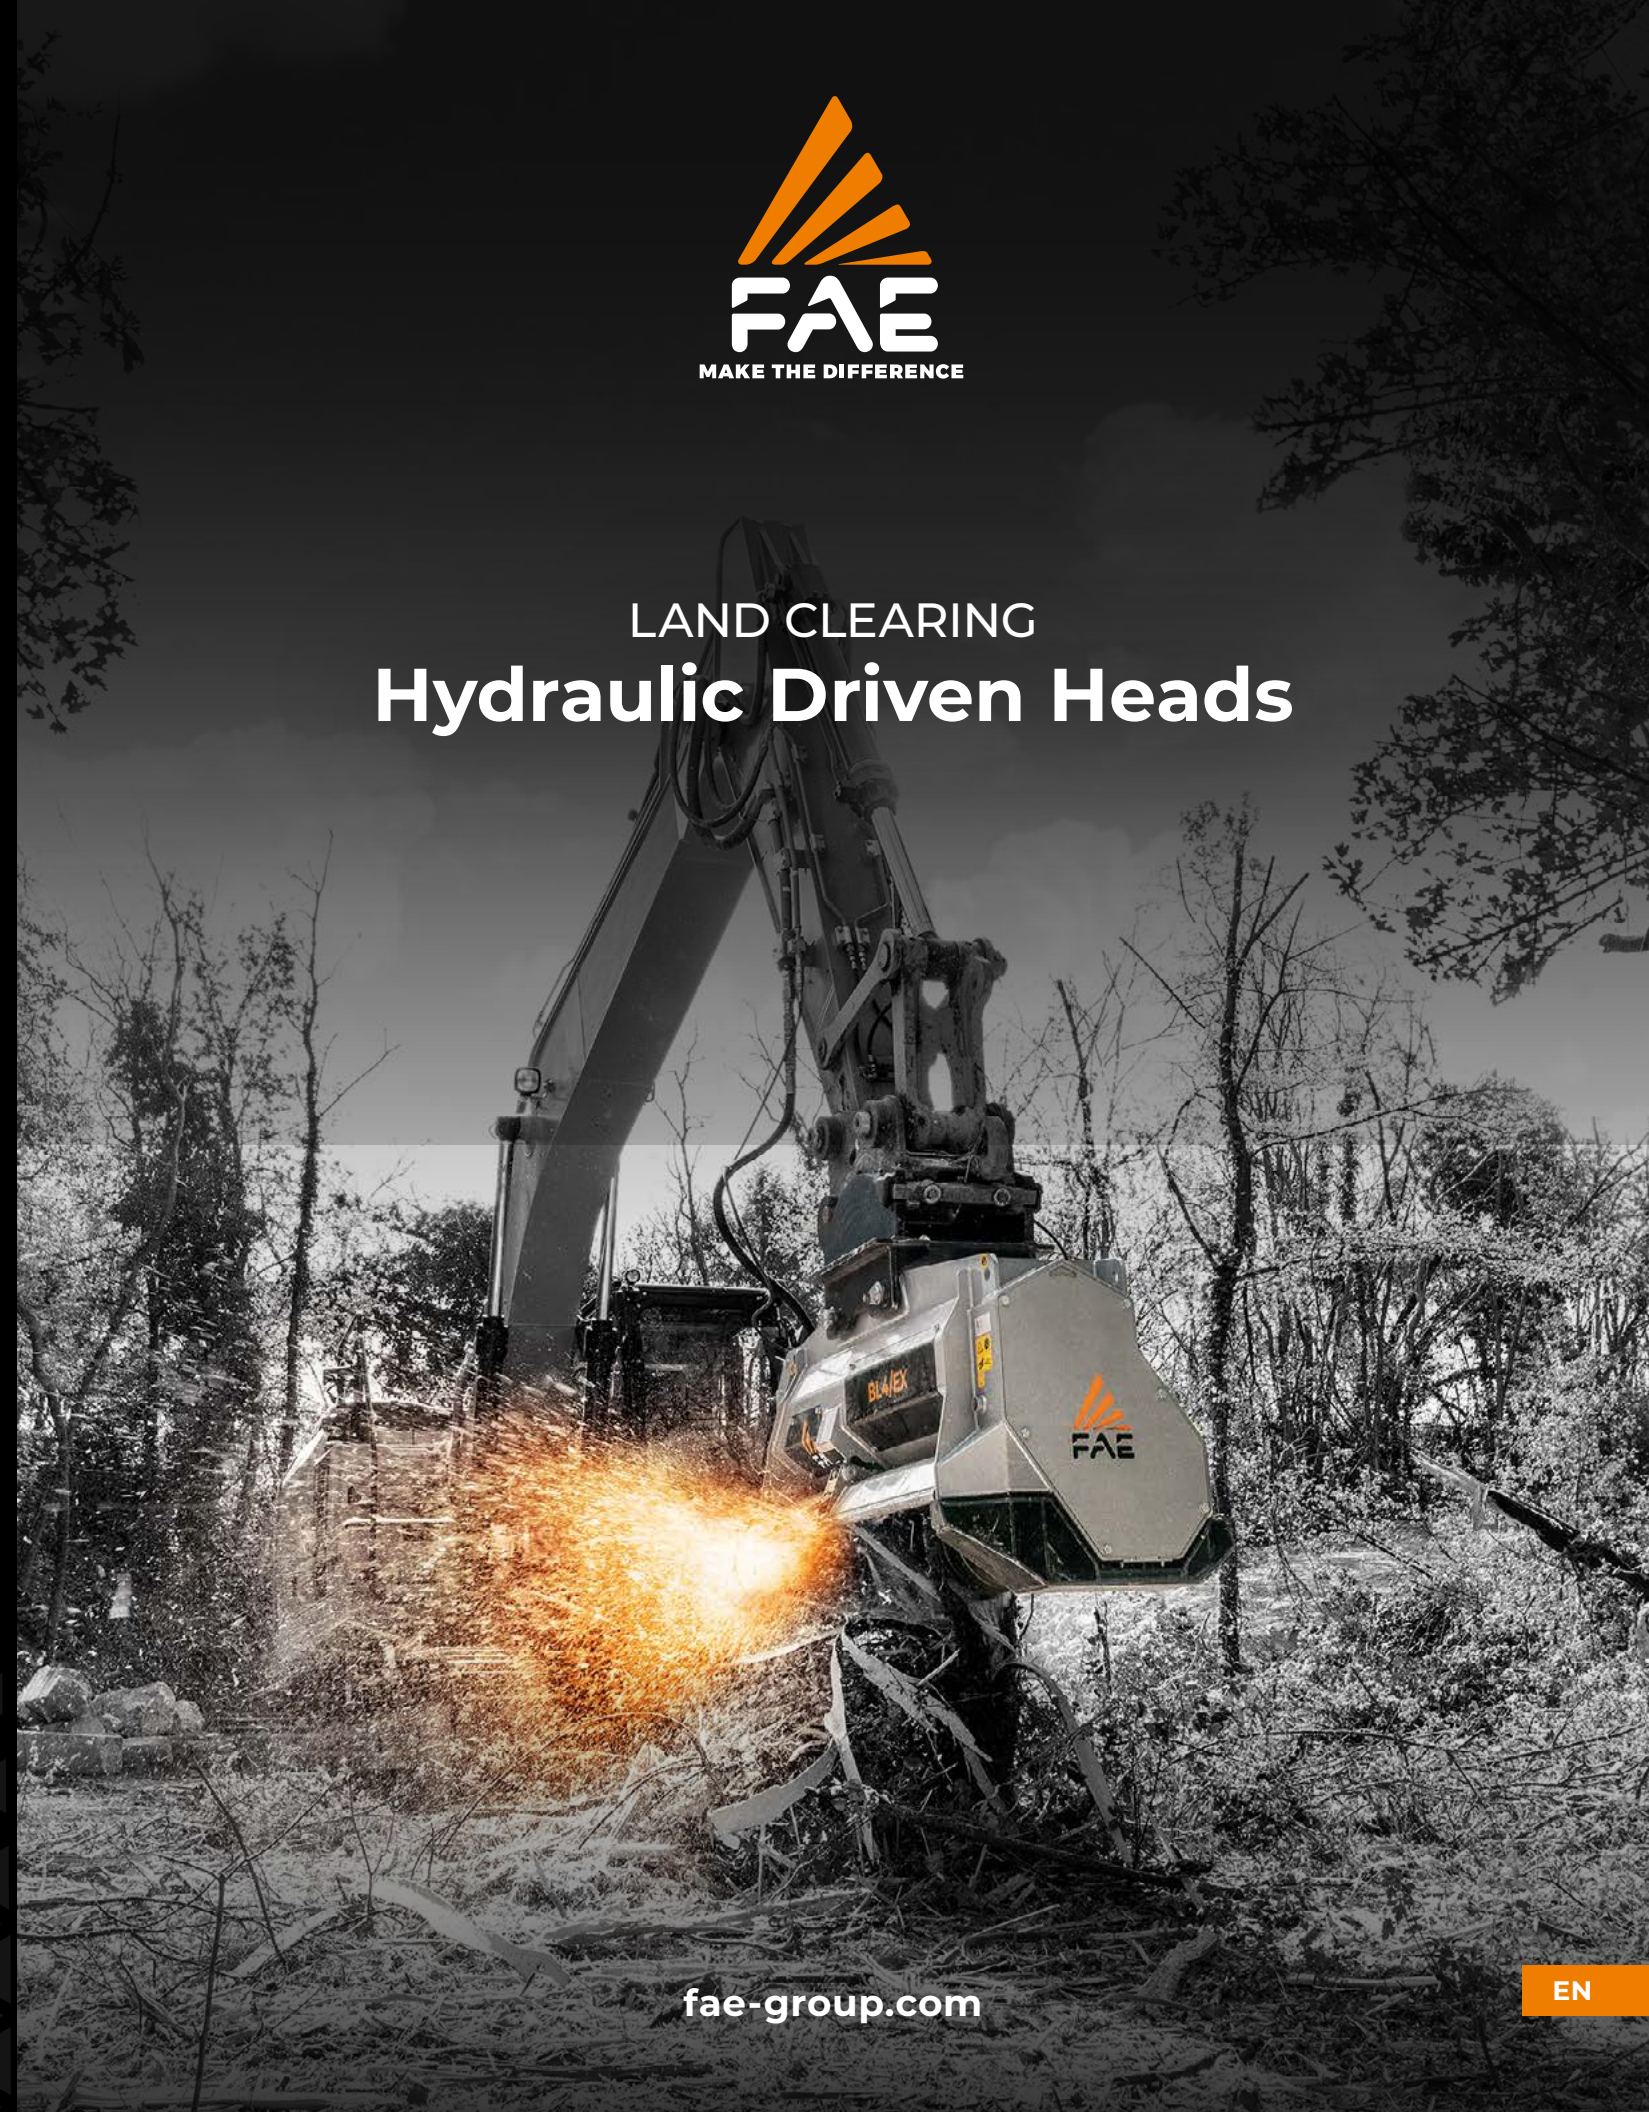

fae-group.com

EN

HYDRAULIC DRIVEN HEADS

FAE offers a wide range of hydraulic driven heads for skid steer loaders, excavators and special hydraulic transmission vehicles. The product range includes mulchers, stump cutters, rotary cutters, tillers and multitask heads that can be used for a variety of tasks such as mulching, shredding and crushing.

MULCHERS FOR EXCAVATORS

-  2-40 t
-  7-119 gal/min
-  Ø 2-16 in
-  Sonic

For mulching trees, branches and vegetation, exposed stumps, underbrush, bushes and agricultural debris.



STUMP CUTTERS FOR EXCAVATORS

-  4-24 t
-  13-49 gal/min

For milling buried stumps of all sizes.



STUMP CUTTERS FOR SKID STEERS

-  75-120 hp
-  32-40 gal/min

For milling buried stumps of all sizes.






MULCHERS FOR SKID STEERS

-  45-135 hp
-  13-53 gal/min
-  Ø 3-12 in
-  Sonic

For mulching trees, branches and vegetation, exposed stumps, underbrush, bushes and agricultural debris.



HEADS FOR SPECIAL VEHICLES

-  150-600 hp
-  Ø 8-24 in
-  Depth 39 in max

A range of heads for special vehicles. Forestry mulchers, forestry tillers, stump cutters and multitask heads.



ROTARY CUTTERS FOR SKID STEERS

-  75-150 hp
-  4 in (continuous)
10 in (intermittent)

For shredding bush and small material.



LEARN MORE ABOUT
THE LAND CLEARING
HYDRAULIC RANGE

